


## **FP Series**

### Hydraulic frame press

A frame clamp for gluing rectangular frames with three vertical beams and the lateral beam with two cylinders. The design of vertical beams enables to get closer to one another and allows gluing of very small frames. The frame press is electrically operated. The vertical beams are completed with locking pins, counterweight on chain for easier handling with pistons.

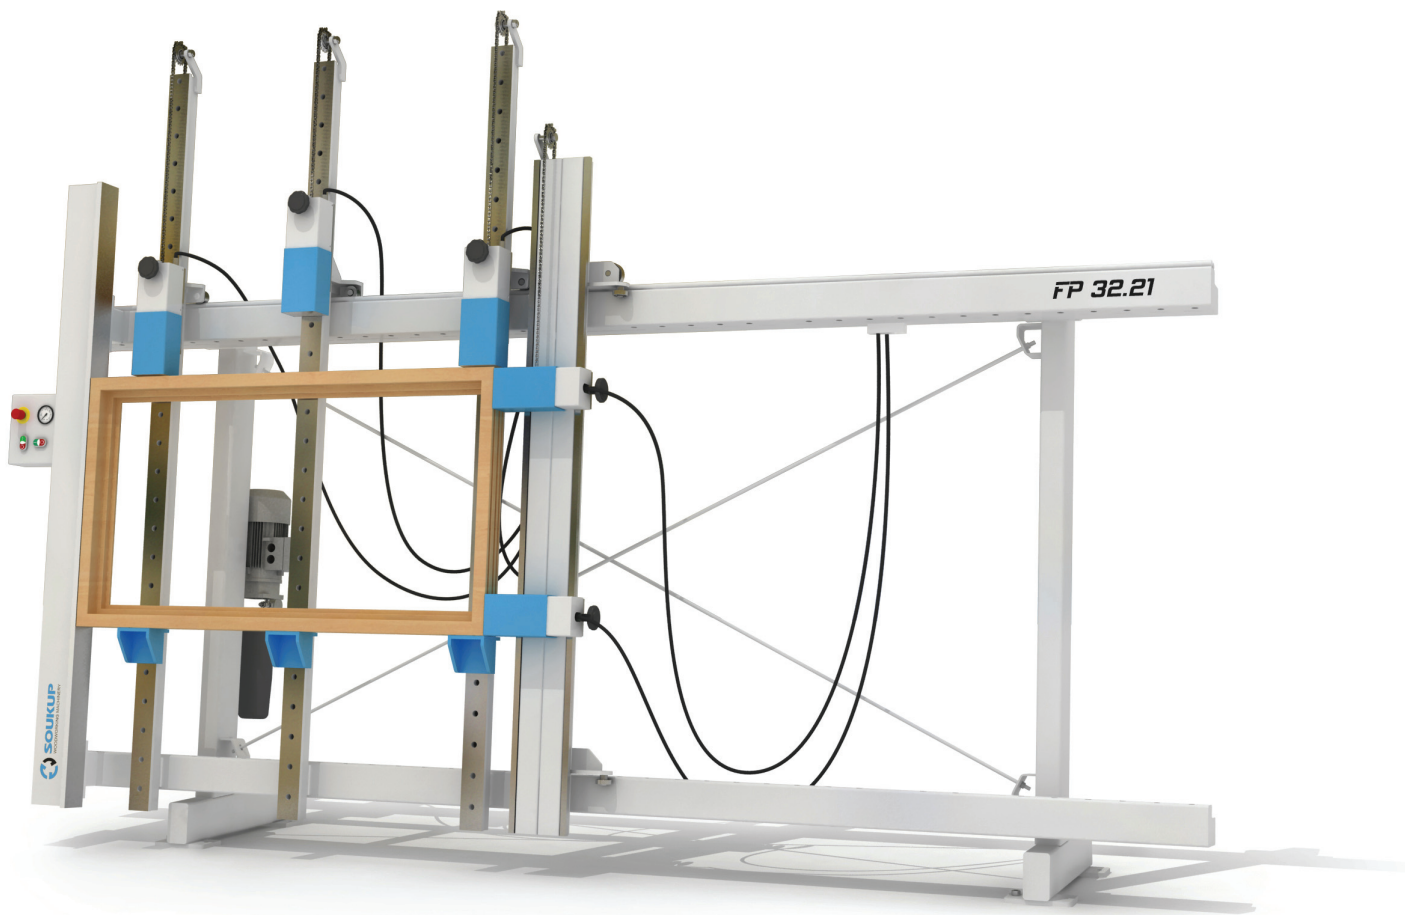

**FP-S 32.21** (3200 x 2100 mm)

upon request:

**FP-S 25.18** (2500 x 1800 mm)

**FP-S 40.26** (4000 x 2600 mm)

- hydraulic cylinders (2000 kg, 150 mm stroke)
  - 3 vertical beams with 1 piston, with self-locking pins
  - counterweights for easier handling
  - 1 lateral clamping unit with 2 pistons
  - common electrically powered pressurising pump
- optional:**
- complete vertical clamp with a hydraulic cylinder for a central pump
  - swivelling plate for bevelled frames
  - front thrust for edge glued panels and laminating scantlings